


Case Sealer LD-Xss

Wash Down Case Sealing for the Real World

This revolutionary case sealer was designed to excel in the most sanitary sensitive industrial environments.

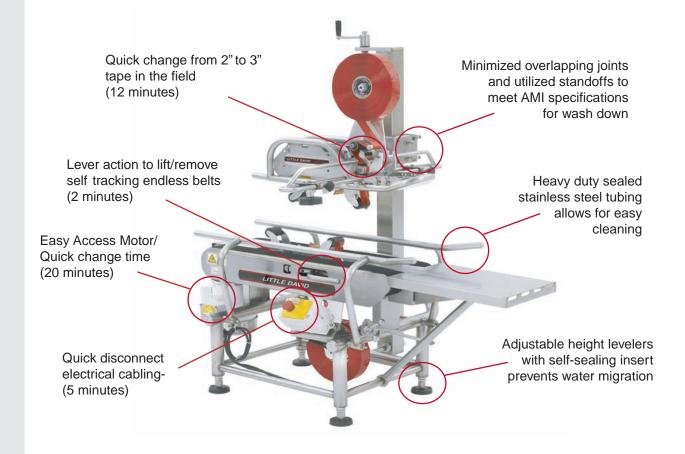


(Shown with optional pack table and squeezers)



LD-Xss

Dimensions:

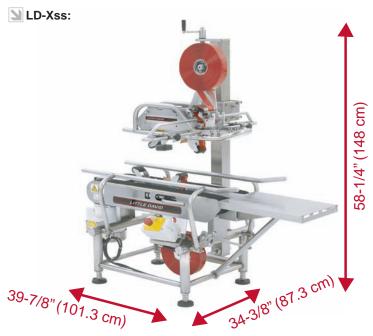

Quick Release Belts:

■ Drive belts can be removed and replaced in a matter of seconds, not minutes. This allows for superior efficiency in strict wash-down environments.



Options of the LD-Xss:

- Recommended Spare Parts Kit
- Spare CAC50 Tape Cartridge
- 3 Phase Motor (any voltage)
- Stainless Steel Top Squeezers
- Stainless Steel Front and Rear Pack Tables
- Stainless Steel Casters
- NEMA 4 Wiring-enclosure-switch & motor w/ epoxy gear reducer

Features of the LD-Xss:

Extremely Durable

- Heavy duty stainless steel design
- Continuous TIG welding

Fast/Easy Maintenance

- Patent pending quick release drive belts
- Easy access motor mounts for fast changeover

Anti-Microbial/Easy-Clean Design

- Maximized water shedding to prevent bacterial growth
- Minimal overlapping joints to meet AMI standards for wash down environments
- Sealed tubular construction promotes easy cleaning

Versatility

- 2" to 3" changeover in field
- Mirror image changeover in field

Reliable Performance - Warranty

- 1 Year all components*
- 2 Years Gear Reducer
- 3 Years Cartridge*

*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® distributor for details.

Specifications of the LD-Xss:

Power Requirements:

110 Volts, 60 cycle, single phase
Note: Other voltages available. Contact Loveshaw for details.

Operating Speed:

 Continuous belt drive; 80' per minute (24.4m/min.) (production rate depends on box size and operator dexterity)

Closure Material

■ Pressure sensitive tape

Weight

■ 269 Lbs. uncrated

Case Capacity

Length: 4-1/2" - infinite **Width:** 5-1/2" - 28" **Height:** 4-1/2" - 24"

Note: Certain length x width x height combinations may not

process due to unstable conveying conditions.



PACKAGING

WWW.IPACK.COM

